



CaviBlaster 2828-D

Diesel Engine, 28 gpm & 2,800 psi

Specifications and Options


This powerful unit generates a super stream of high velocity cavitation for high efficient cleaning, it can strip fouling and corrosion to bare metal if desired

Accessories Included:

Feed Hose (15 feet), By-Pass Hose (15 feet),
High Pressure Hose (50 feet), Zero-Thrust Balanced Gun, Battery Start

Optional Accessories:

Additional pressure hose available in 50 ft or 100 ft sections
Max. Pressure hose length recommended up to 300 ft (100 meters) total

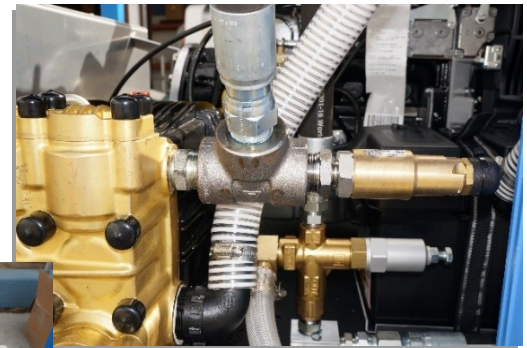

SKID Dimensions	
Length	59" / 150 cm
Width	51" / 130 cm
Height	51" / 130 cm
Weight	1,600 Lbs / 727 kg
Fuel Containment Pan	YES
Lifting Eyes / FL Slots	YES / YES



Pump System	
Pressure Pump	Udor VX-100/200
Pump Material / Type	Brass Positive Displacement
Flow Rate	28 gpm / 106 Lpm
Nozzle Pressure	2,800 psi / 193 Bar
Hose Diam/Max Lgth	3/4" - 300 ft / 19 mm / 100 m

Feed System	
Feed Pump	Centrifugal Self-Priming
Pump Material	20 ft / 6 meter
Flow Rate	40 gpm / 151 Lpm
Drive	Belt Driven

Shipping Dimensions	
Pallet 52x60x58"	1,800 Lbs Gross weight

Drive System	
Engine	Kubota D1803-CR-TE4B
EPA Requirement	USA Tier 4F/ EU stage III-B
Engine Type	4-Cylinder / 4-Cycle
Cooling System	Liquid with Axial Fan
Combustion System	IDI Turbocharged
Exhaust	Cycl. Muffler/Spark arrester
Int. Output:	49.6 HP / 37 kW

Tool Options	
Zero-Thrust Balanced Gun	
Double Zero-Thrust Balanced Guns	
Double CaviDome	
ROV Lance	

* Pricing and specifications subject to change without notice

CaviDyne LLC, 5077 Fruitville Rd. Suite - 109-157, Sarasota FL, 34232 USA
Phone: (352)275-5319, sales@cavidyne.com, www.cavidyne.com



CAVIBLASTER™